

Ratings Range – 60 Hertz Operation

Standby: kW 96 - 150
kVA 96 - 188

Prime: kW 84 - 140
kVA 84 - 175

Baldor generators are available in a variety of power ratings and installation styles to meet the energy needs of the smallest businesses and the largest manufacturing facilities. All generator sets are designed to meet the specifications to ensure the fastest startup and dependable long-term operation. Rely on Baldor generators to provide the clean, quiet and environmentally friendly electrical power when you need it most. Emergency backup, standby, prime power, peak shaving or for any of your day or night electrical power needs, you can count on a dependable Baldor generator to provide the peace of mind and security you desire.

Standby and Prime Power Features

- ✓ Heavy-duty industrial diesel engine that meets the latest EPA emissions levels
- ✓ Brushless synchronous alternators with dynamic balancing and four pole construction
- ✓ Fully featured microprocessor based controller that's easy to use and field programmable for customized installations
- ✓ Generator sets are prototype tested and production tested to ensure easy startup
- ✓ Gen-set accepts rated load in one step
- ✓ Heavy duty construction that's designed for use in prime or standby applications
- ✓ Manufactured in a dedicated and secure ISO-9001 certified facility
- ✓ Generator sets are backed by a world wide network of parts and service centers
- ✓ Optional agency approvals available including UL2200 and NFPA110
- ✓ Optional environmental enclosures available including weather resistant, sound attenuated, containerized, and walk-in models
- ✓ Full range of genset accessories and factory installed options available

Genset Ratings

Genset Model Number	Alternator	Voltage L-N / L-L	Phase	Hertz	150°C Rise Standby Rating		125°C Rise Prime Rating	
					kW / kVA	Amps	kW / kVA	Amps
IDLC150-3J	UCI274E-311	120 / 208	3	60	136 / 170	472	128 / 160	445
		(1) 120 / 240	3	60	136 / 170	409	128 / 160	385
		(1) 120 / 240	1	60	96 / 96	400	84 / 84	350
		139 / 240	3	60	150 / 188	452	140 / 175	421
		220 / 380	3	60	124 / 155	236	112 / 140	213
		277 / 480	3	60	150 / 188	226	140 / 175	211
	UCI274E-17	347 / 600	3	60	150 / 188	181	140 / 175	169
	UCI274F-311	120 / 208	3	60	150 / 188	521	140 / 175	486
		(1) 120 / 240	3	60	150 / 188	452	140 / 175	421
		(1) 120 / 240	1	60	108 / 108	450	97 / 97	404
		139 / 240	3	60	150 / 188	452	140 / 175	421
		220 / 380	3	60	137 / 171	260	132 / 165	251
		277 / 480	3	60	150 / 188	226	140 / 175	211
	UCI274F-17	347 / 600	3	60	150 / 188	181	140 / 175	169
UCI274F-06	(1) 120 / 240	1	60	150 / 150	625	135 / 135	563	

NOTES: (1) Alternator connections have two circuits available for low voltage. Available current in each low voltage circuit is equal to high voltage current listed in table. For ratings and voltages not listed above refer to the Genset Selector. Standby ratings do not have an overload capability but can be used for the duration of the utility failure per ISO-3046, DIN6271 and BS5514. Prime (Unlimited Running Time) ratings are continuous per DIN 6271 and ISO-3046 with 10% overload capacity. Baldor reserves the right to implement specifications or design changes without notice.

Engine Application Data

Engine Specifications

Manufacturer	John Deere
Engine Model #	6068HF285
Engine Type	4 Cycle, 6 Cylinder
Induction System	Turbo, Charge Air Cooled
Displacement, L (in ³)	6.8 (415)
EPA Emissions Level	Tier 3
HP at Rated Speed BHP (kW _m)	237 (177)
Rated RPM	1800
Bore and Stroke in(mm)	4.19x5.00 (106x127)
Compression Ratio	19.0:1
Air Filter Type	Dry
Governor Type/Model	JDEC Electronic
Governor Manufacturer	John Deere
Freq Reg NL to FL	Isochronous
Freq Reg Steady State	±0.25%

Engine Lubrication System

Oil Pan Capacity gal(L)	8.6 (32.5)
Oil Pan w/Filter	8.8 (33.4)
Oil Filter Quantity	1
Oil Filter Type	Cartridge
Oil Cooler	Water Cooled
Recommended Oil	15W-40
Oil Press psi(kPa)	44 (300)

Engine Cooling System

Genset Max Ambient Temp °F(°C)	122 (50)
Engine Coolant Cap qt(L)	13 (12.3)
Engine + Radiator System Cap qt(L)	31 (29.3)
Water Pump Type	Centrifugal
Coolant Flow gpm (Lpm)	48 (180)
Heat Rejected to Cooling Water @ Rated kW; Btu/min (kW)	5324 (93.5)
Heat Rejected to Charge Cooler @ Rated kW; Btu/min (kW)	1821 (32)
Max Restriction of Cooling Air in H ₂ O(kPa)	0.5 (0.124)

Engine Exhaust System

Exhaust Manifold Type	Dry
Exhaust Flow @ Rated kW cfm(cmm)	1201 (34.0)
Exhaust Temp (dry manifold) °F(°C)	941 (505)
Min Back Pressure inH ₂ O(kPa)	0 (0)
Max Back Pressure inH ₂ O(kPa)	30 (7.5)
Exhaust Outlet Diameter in(mm)	4.0 (101.6)
Exhaust Outlet Type	O. D. Tube

Engine Electrical System

Charging Alternator Volts dc	12
Charging Alternator Amps	65
Grounding Polarity	Negative
Starter Motor Volts dc	12
Battery Recommendations	
Battery Volts dc	12
Min Cold Cranking Amps	800
Quantity Required	1

Ventilation Requirements

Cooling Airflow scfm(cmm)	10142 (287)
Combustion Airflow cfm(cmm)	480 (14)
Heat Rejected to Ambient	
From Engine Btu/min(kW)	1990 (35)
From Alternator Btu/min(kW)	1024 (18)
Recommended Free Area Intake	
Louver Size ft ² (m ²)	22 (2.04)

Engine Fuel System

Recommended Fuel	#2 Diesel
Fuel Line at Engine	
Supply Line Min ID in(mm)	0.44 (11)
Return Line Min ID in(mm)	0.25 (6)
Fuel Pump Type	Engine Driven
Fuel Pump Max Lift ft (m)	6 (2)
Max Flow to Pump gph(Lph)	28.3 (107)
Fuel Filter	
Secondary Filter	2µm
Secondary Water Separator	Included
Primary Filter	30µm
Primary Water Separator	Included

Fuel Consumption – Standby Rating

100% Load gph(Lph)	11.8 (44.7)
75% Load gph(Lph)	9 (34.1)
50% Load gph(Lph)	6.2 (23.5)
25% Load gph(Lph)	3.5 (13.2)

Fuel Consumption – Prime Rating

100% Load gph(Lph)	10.9 (41.3)
75% Load gph(Lph)	8.5 (32.2)
50% Load gph(Lph)	6.2 (23.5)
25% Load gph(Lph)	3.2 (12.1)

Engine Output Deratings - Standby

Rated Temp	77°F
Rated Altitude	1,000 ft
Max Altitude	10,000 ft
Temperature Derate	-1% / 20°F
Altitude Derate	-1% / 2000 ft

Alternator Specifications

Alternator Type	4-Pole, Rotating Field	Automatic Voltage Regulator	
Exciter Type	Brushless	Wound Field	SX460
Excitation System		PMG	Opt MX341, Opt MX321
Shunt Connection	Standard	Voltage Regulation	No Load to Full Load
PMG	Optional	Std Regulator	+/- 1.5%
Insulation	per NEMA MG1	PMG Regulator	+/- 1%, +/- 0.5%
Material	Class H	Load Acceptance	100% of Rating, One Step
Standby Temp Rise	150°C	Subtransient Reactance	
Prime Temp Rise	125°C	480V, Per Unit	14%
Lead Connection	12 Lead, Reconnectable	TIF (1960 Weighting)	<50
Stator Pitch	2/3	Line Harmonics	5% Maximum
Amortisseur Winding	Full	Motor Starting kVA	30% Max Voltage Dip
Bearing	Single, Double Shielded	Alt @ 480V SkVA	UCI274E-311 - 450 kVA
Drive Coupling	Flexible Disk	Alt @ 480V SkVA	UCI274F-311 - 520 kVA
Unbalanced Load	20% of Standby Rating		

Genset Controller Specifications

Baldor IntelliLite NT Features

Large back-lit graphical LCD Display
64x128 pixel resolution

6 LED Genset Status Indicators

Alarm	Red LED
Not In Auto	Red LED
Warning	Yellow LED
Running	Green LED
Ready / Auto	Green LED
Supplying Load	Green LED


Sealed Membrane Panel to IP65

Push Buttons for Simple Control

Start, Stop, Fault Reset, Horn Reset, Mode, Page, and Enter Keys

Display Metering and Protection

Oil Pressure Warning / Shutdown
High/Low Coolant Temperature Warning
High Coolant Temperature Shutdown
Low Coolant Level Shutdown
Low Fuel Level Warning / Shutdown
Over Speed Protection
Battery Voltage Under/Over Warning
Running Hour Meter
Generator Under/Over Volts Warn/Shutdown
Generator Under/Over Freq Warn/Shutdown
Generator Over Current Shutdown
Generator Output Metering for V1-V3, I1-I3,
Hz, kW, kWh, kVAr, kVAh

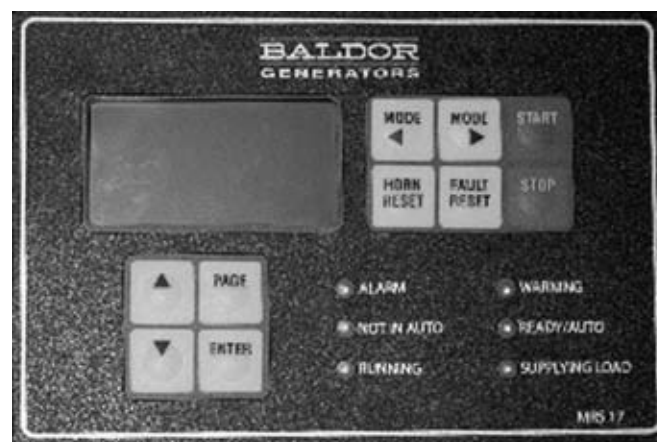

NFPA110 Compliance

An optional Remote Annunciator is available to meet NFPA110 applications

Remote Annunciator Features – RA15

15 LED Indicators with Function Labels
Horn Reset and Lamp Test keys
CAN Bus Connection for up to 600 Feet



Additional Standard Genset Features

- ✓ Formed Steel Sub-Base
- ✓ Integral Vibration Isolation
- ✓ Sub-Base Lifting Eyes
- ✓ Unit Mounted Radiator
- ✓ Engine Mounted Fan
- ✓ Radiator Core and Fan Guards
- ✓ Battery Charging Alternator
- ✓ Battery Rack and Cables
- ✓ Unit Mounted Control Panel
- ✓ Spin-On Filters for Oil and Fuel
- ✓ Enamel Finish
- ✓ One Set - Operation / Maintenance Manual
- ✓ Factory Tested Prior to Shipment
- ✓ Limited Warranty


Optional Agency Approvals

- UL2200 (Review Option Availability)
- NFPA110 (Request Remote Annunciator)

Weight and Dimensions (Open Unit)

Weight – Wet lb(kg)	3306 (1285)
Overall Dimensions	Length x Width x Height
inches	108 x 42 x 53
mm	2743 x 1067 x 1346

Note: Drawing is provided for reference only. Use engineering outline for installation planning

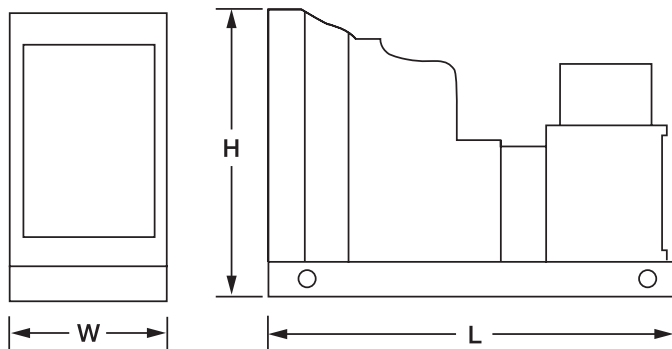

Available Accessories and Options

Open Unit

- Industrial Silencer
- Residential Silencer
- Critical Silencer
- Super Critical Silencer
- Exhaust Flex Pipe
- Rain Cap
- Radiator Duct Flange

Enclosed Units

- Weather Resistant Enclosure
- Sound Attenuated w/Internal Critical Silencer
- ISO Container
- Walk-In Enclosure

Alternator Accessories

- PMG Exciter and AVR Upgrade
- Alternator Space Heater
- Exciter Field Circuit Breaker
- Alternator Drip Shield

Genset Accessories

- Voltage Adjust Potentiometer
- Starting Battery

Battery Charger Auto/Float

Auto/Float Equalize Timer Manual Automatic

Battery Heater

Engine Coolant Heater

Oil & Coolant Drain Valves (Engine/Radiator)

Oil & Coolant Drain Extended to Base

Main Output Breaker Wall Mount Unit Mount

Transfer Switch Manual Automatic

Control Panel

- Remote Annunciator
- Remote Communications
- Remote E-Stop

Fuel System and Sub-Base Fuel Tank

Sub-Base Tank Single Wall Double Wall

UL142 Double Wall with Containment

Tank Run Time @ 100% Load

- 12-16 Hours
- 24-36 Hours

Flex Fuel Line

Primary Fuel / Water Separator

Vibration Isolators

Location Under Tank Between Tank

Elastomer Isolator Pad Isolator

Standard Spring Spring for Seismic Zone 4

BALDOR

GENERATORS

WORLD HEADQUARTERS

Baldor Electric Company • P. O. Box 2400 • Fort Smith, AR 72902-2400 U.S.A.
Phone (479) 646-4711 • Fax (479) 648-5792 • International Fax (479) 648-5895

www.baldor.com